

LT-DMX-6803 DMX512 DECODER

User's Manual



(Please read this manual carefully before use)

Forward

Thanks for choosing our LT-DMX-6803 Decoder. Before installation and usage, we strongly recommend you to read through this manual carefully.

After-Sales

From the day you purchase our products within a year, if being used properly in accordance with the instruction, and quality problems occur, we provide free repair or replacement services except the following cases:

1. Any defects caused by wrong operations..
2. Any damages caused by inappropriate power supply or abnormal voltage.
3. Any damages caused by unauthorized removal, maintenance, modifying circuit, incorrect connections and replacing chips.
4. Any damages due to transportation, breaking, flooding water after the purchase.
5. Any damages caused by earthquake, fire, flood, lightning strike etc force majeure of natural disasters.
6. Any damages caused by negligence, inappropriate storing at high temperature and humidity environment or near harmful chemicals.
7. Product has been updated.

Safety warnings

1. Please don't install this controller in lightening, intense magnetic and high-voltage fields.
2. To reduce the risk of component damage and fire caused by short circuit, make sure correct connection
3. Always be sure to mount this unit in an area that will allow proper ventilation to ensure a fitting temperature.
4. Check if the voltage and power adapter suit the controller (**please select DC5-24V power supply with constant voltage**)
5. Don't connect cables with power on, make sure a correct connection and no short circuit checked with instrument before power on.
6. Please don't open controller cover and operate if problems occur.

The manual is only suitable for this model, any update is subject to change without prior notice.


Product Brief

LT-DMX-6803 DMX512 decoder is dedicated to run LED pixel lights with chip LPD-6803 , with the help of DMX decoder's data conversion, all led pixel lights with Chip LPD6803, Chip LPD-6803 outputs 3 CC channels, with built-in grey scale processor, compatible with 32/256 grey scales, the data cable includes only two cords, convenient for design and installation of LED lights. Chip 6803 is widely used among LED pixel light, LED dreamy wall, LED pixel screen, SMD strip, hi-power flood light and led wall washer etc.


I . Specifications:

| | |
|-------------------|----------------------------|
| Input voltage | DC5V~DC24V |
| Input signal | DMX512/1990 |
| Output signal | LPD6803/D705 data protocol |
| Decoder channel s | 360/512 dmx channels |
| Grey Scale | 256 levels |
| DMX512 socket: | Standard xLR-3 connector |
| Dimension | L125xW52xH40mm |
| Package Size | L135xW70xH50mm |
| Weight (G.W) | 300g |

II . Configuration Diagram:

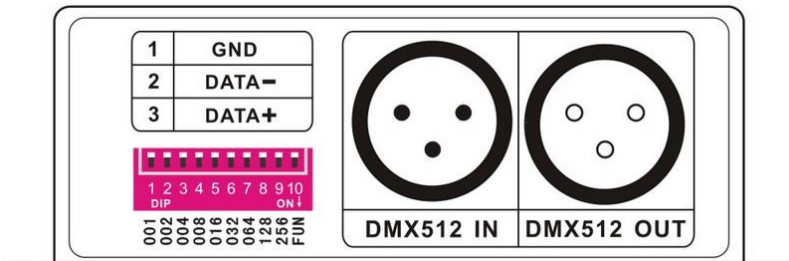

DMX Input Terminal

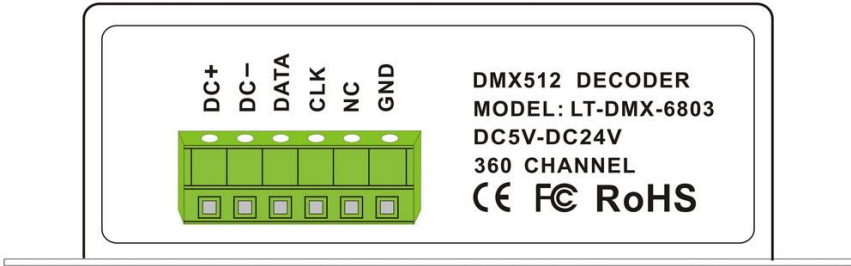

6803 Data output terminal

Terminal definition:

| Terminal | Function |
|----------|---------------------|
| DC+ DC- | DC5-24V power input |
| DATA | Data cord |
| CLK | Clock cord |
| NC | No connection |
| GND | Ground cord |



Warning: the power cable can't connect the data port, otherwise it will damage the decoder!

III. Address Setting

This decoder can decode 96 DMX addresses, adopted Dip switch to set the address, the Dip switches from 1 to 9 are a kind of binary value coding switches, the 1st bit is LSC, the 9th bit MSC, can set 511 addresses totally.

DMX512 initial address code is equal to the total amount of the Dip switches' numbers from 1 to 9, press Dip switch downward (ON: at position "1"), you can get the number of its position, if press upward (at position "0"), the value of its position is 0.



Only when the DIP switch FUN(10)=OFF(at position "0"), DMX512 signal is accepted

Example 1: Set to 37

Set the 6th, 3rd, 1st bit of the DIP switch downward to "1", others to "0" (Figure 1), the total sum from 1 to 9 is 32+4+1, so the DMX512 initial address code is 37.

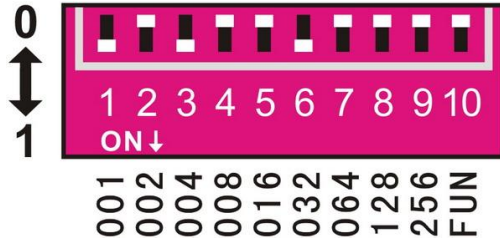


Figure 1

Example 2:

Set DMX512 original address code as 385: Set the 9th, 8th, 1st bit of the DIP switch downward to “1”, the rest to “0” (as Figure 2), the total sum from 1 to 9 is 256+128+1, so the DMX512 original address code is 385.

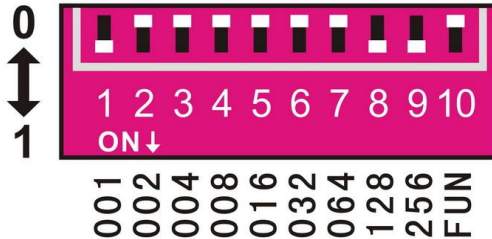


Figure 2

IV. Instructions on the testing function

The 10th DIP switch is FUN, acting as the function key.

FUN=OFF works to receive DMX512 signals.

FUN=ON works to test decoders as Figure 3:

SWITCH1—9 OFF: BLACK

SWITCH1 IS ON: RED

SWITCH2 IS ON: GREEN

SWITCH3 IS ON: BLUE

SWITCH4 IS ON: YELLOW

SWITCH5 IS ON: PURPLE

SWITCH6 IS ON: CYAN

SWITCH7 IS ON: WHITE

SWITCH8 IS ON: 7 CLOLOR JUMPING (8 speed steps)

SWITCH9 IS ON: 7 COLOR SMOOTH (8 speed steps)

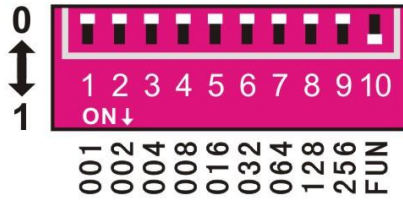


Figure 3



See Figure 4, if multi dip switches are on, the function is subject to the last switch.


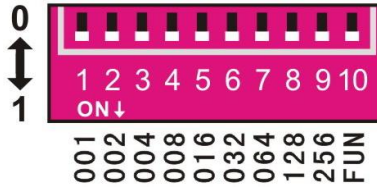



Figure 4

V. Connects with LED pixel lights:

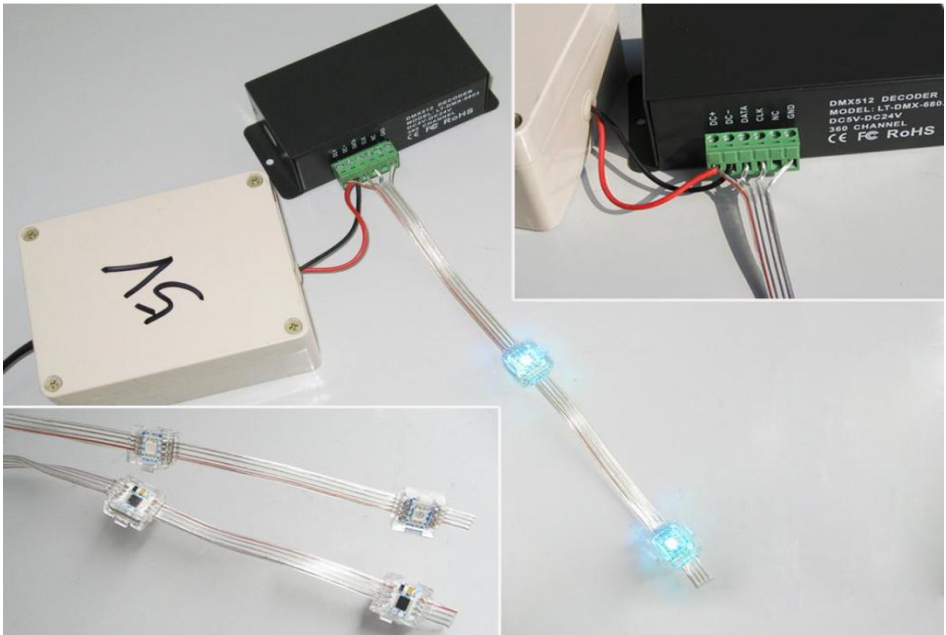


VI.Conjunction Diagram (LED lights are all with LPD6803/D705 driving chips)

1. Connects with LED pixel lights:

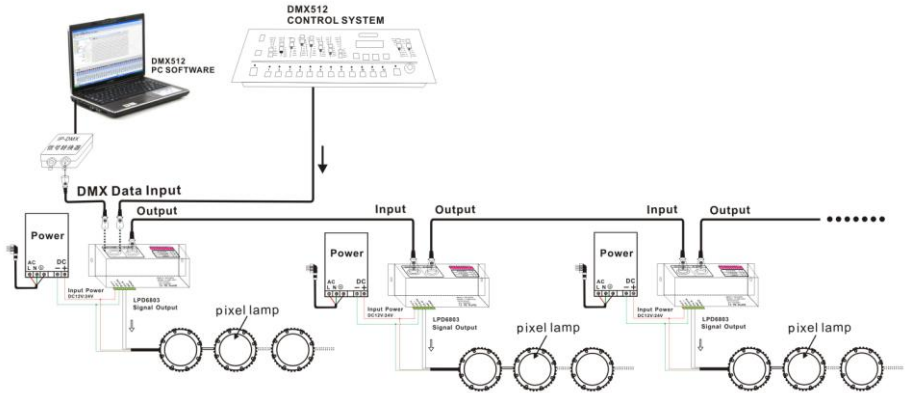

2. Connects to LED Hi-power wall washer:

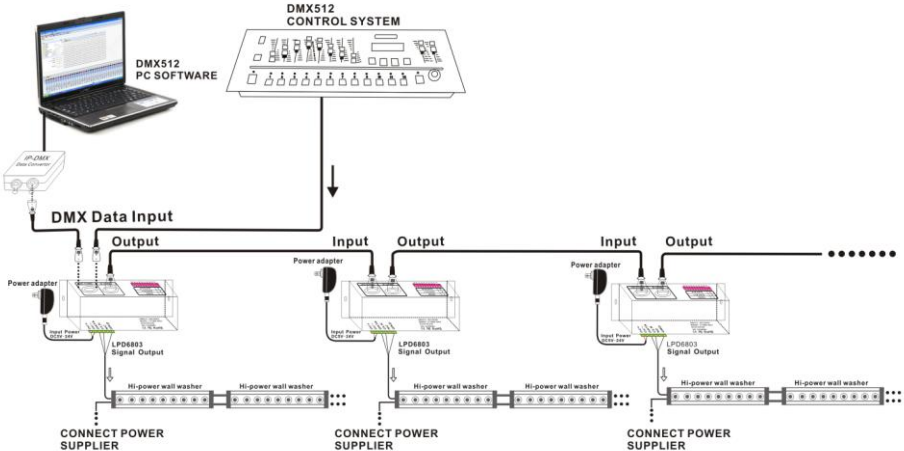

According to DMX512 protocol, in order to ensure a steady data transmission, you should add a **metalster**(Metal Thin Film resistor, 90-120Ω 1/4 W)at the end of each layout of DMX data cable(between Foot 2 and Foot 3, Data + and Data -), please also refer to your dmx console manual to select a correct resistor

Appendix: DMX Address Setting Table

| DIP SWITCH | DMX ADDR | DIP SWITCH | DMX ADDR | DIP SWITCH | DMX ADDR |
|------------|----------|------------|----------|------------|----------|
| 123456789 | NUMBER | 123456789 | NUMBER | 123456789 | NUMBER |
| 100000000 | 001 | 001110000 | 028 | 111011000 | 055 |
| 010000000 | 002 | 101110000 | 029 | 000111000 | 056 |
| 110000000 | 003 | 011110000 | 030 | 100111000 | 057 |
| 001000000 | 004 | 111110000 | 031 | 010111000 | 058 |
| 101000000 | 005 | 000001000 | 032 | 110111000 | 059 |
| 011000000 | 006 | 100001000 | 033 | 001111000 | 060 |
| 111000000 | 007 | 010001000 | 034 | 101111000 | 061 |
| 000100000 | 008 | 110001000 | 035 | 011111000 | 062 |
| 100100000 | 009 | 001001000 | 036 | 111111000 | 063 |
| 010100000 | 010 | 101001000 | 037 | 000000100 | 064 |
| 110100000 | 011 | 011001000 | 038 | 100000100 | 065 |
| 001100000 | 012 | 111001000 | 039 | 010000100 | 066 |
| 101100000 | 013 | 000101000 | 040 | 110000100 | 067 |
| 011100000 | 014 | 100101000 | 041 | 001000100 | 068 |
| 111100000 | 015 | 010101000 | 042 | 101000100 | 069 |
| 000010000 | 016 | 110101000 | 043 | 011000100 | 070 |
| 100010000 | 017 | 001101000 | 044 | 111000100 | 071 |
| 010010000 | 018 | 101101000 | 045 | 000100100 | 072 |
| 110010000 | 019 | 011101000 | 046 | 100100100 | 073 |
| 001010000 | 020 | 111101000 | 047 | 010100100 | 074 |
| 101010000 | 021 | 000011000 | 048 | 110100100 | 075 |
| 011010000 | 022 | 100011000 | 049 | 001100100 | 076 |
| 111010000 | 023 | 010011000 | 050 | 101100100 | 077 |
| 000110000 | 024 | 110011000 | 051 | 011100100 | 078 |
| 100110000 | 025 | 001011000 | 052 | 111100100 | 079 |
| 010110000 | 026 | 101011000 | 053 | 000010100 | 080 |
| 110110000 | 027 | 011011000 | 054 | 100010100 | 081 |

Appendix: DMX Address Setting Table

| DIP SWITCH | DMX ADDR | DIP SWITCH | DMX ADDR | DIP SWITCH | DMX ADDR |
|------------|----------|------------|----------|------------|----------|
| 123456789 | NUMBER | 123456789 | NUMBER | 123456789 | NUMBER |
| 010010100 | 082 | 101101100 | 109 | 000100010 | 136 |
| 110010100 | 083 | 011101100 | 110 | 100100010 | 137 |
| 001010100 | 084 | 111101100 | 111 | 010100010 | 138 |
| 101010100 | 085 | 000011100 | 112 | 110100010 | 139 |
| 011010100 | 086 | 100011100 | 113 | 001100010 | 140 |
| 111010100 | 087 | 010011100 | 114 | 101100010 | 141 |
| 000110100 | 088 | 110011100 | 115 | 011100010 | 142 |
| 100110100 | 089 | 001011100 | 116 | 111100010 | 143 |
| 010110100 | 090 | 101011100 | 117 | 000010010 | 144 |
| 110110100 | 091 | 011011100 | 118 | 100010010 | 145 |
| 001110100 | 092 | 111011100 | 119 | 010010010 | 146 |
| 101110100 | 093 | 000111100 | 120 | 110010010 | 147 |
| 011110100 | 094 | 100111100 | 121 | 001010010 | 148 |
| 111110100 | 095 | 010111100 | 122 | 101010010 | 149 |
| 000001100 | 096 | 110111100 | 123 | 011010010 | 150 |
| 100001100 | 097 | 001111100 | 124 | 111010010 | 151 |
| 010001100 | 098 | 101111100 | 125 | 000110010 | 152 |
| 110001100 | 099 | 011111100 | 126 | 100110010 | 153 |
| 001001100 | 100 | 111111100 | 127 | 010110010 | 154 |
| 101001100 | 101 | 000000010 | 128 | 110110010 | 155 |
| 011001100 | 102 | 100000010 | 129 | 001110010 | 156 |
| 111001100 | 103 | 010000010 | 130 | 101110010 | 157 |
| 000101100 | 104 | 110000010 | 131 | 011110010 | 158 |
| 100101100 | 105 | 001000010 | 132 | 111110010 | 159 |
| 010101100 | 106 | 101000010 | 133 | 000001010 | 160 |
| 110101100 | 107 | 011000010 | 134 | 100001010 | 161 |
| 001101100 | 108 | 111000010 | 135 | 010001010 | 162 |

Appendix: DMX Address Setting Table

| DIP SWITCH | DMX ADDR | DIP SWITCH | DMX ADDR | DIP SWITCH | DMX ADDR |
|------------|----------|------------|----------|------------|----------|
| 123456789 | NUMBER | 123456789 | NUMBER | 123456789 | NUMBER |
| 110001010 | 163 | 011111010 | 190 | 100110110 | 217 |
| 001001010 | 164 | 111111010 | 191 | 010110110 | 218 |
| 101001010 | 165 | 000000110 | 192 | 110110110 | 219 |
| 011001010 | 166 | 100000110 | 193 | 001110110 | 220 |
| 111001010 | 167 | 010000110 | 194 | 101110110 | 221 |
| 000101010 | 168 | 110000110 | 195 | 011110110 | 222 |
| 100101010 | 169 | 001000110 | 196 | 111110110 | 223 |
| 010101010 | 170 | 101000110 | 197 | 000001110 | 224 |
| 110101010 | 171 | 011000110 | 198 | 100001110 | 225 |
| 001101010 | 172 | 111000110 | 199 | 010001110 | 226 |
| 101101010 | 173 | 000100110 | 200 | 110001110 | 227 |
| 011101010 | 174 | 100100110 | 201 | 001001110 | 228 |
| 111101010 | 175 | 010100110 | 202 | 101001110 | 229 |
| 000011010 | 176 | 110100110 | 203 | 011001110 | 230 |
| 100011010 | 177 | 001100110 | 204 | 111001110 | 231 |
| 010011010 | 178 | 101100110 | 205 | 000101110 | 232 |
| 110011010 | 179 | 011100110 | 206 | 100101110 | 233 |
| 001011010 | 180 | 111100110 | 207 | 010101110 | 234 |
| 101011010 | 181 | 000010110 | 208 | 110101110 | 235 |
| 011011010 | 182 | 100010110 | 209 | 001101110 | 236 |
| 111011010 | 183 | 010010110 | 210 | 101101110 | 237 |
| 000111010 | 184 | 110010110 | 211 | 011101110 | 238 |
| 100111010 | 185 | 001010110 | 212 | 111101110 | 239 |
| 010111010 | 186 | 101010110 | 213 | 000011110 | 240 |
| 110111010 | 187 | 011010110 | 214 | 100011110 | 241 |
| 001111010 | 188 | 111010110 | 215 | 010011110 | 242 |
| 101111010 | 189 | 000110110 | 216 | 110011110 | 243 |

Appendix: DMX Address Setting Table

| DIP SWITCH | DMX ADDR | DIP SWITCH | DMX ADDR | DIP SWITCH | DMX ADDR |
|------------|----------|------------|----------|------------|----------|
| 123456789 | NUMBER | 123456789 | NUMBER | 123456789 | NUMBER |
| 001011110 | 244 | 111100001 | 271 | 010101001 | 298 |
| 101011110 | 245 | 000010001 | 272 | 110101001 | 299 |
| 011011110 | 246 | 100010001 | 273 | 001101001 | 300 |
| 111011110 | 247 | 010010001 | 274 | 101101001 | 301 |
| 000111110 | 248 | 110010001 | 275 | 011101001 | 302 |
| 100111110 | 249 | 001010001 | 276 | 111101001 | 303 |
| 010111110 | 250 | 101010001 | 277 | 000011001 | 304 |
| 110111110 | 251 | 011010001 | 278 | 100011001 | 305 |
| 001111110 | 252 | 111010001 | 279 | 010011001 | 306 |
| 101111110 | 253 | 000110001 | 280 | 110011001 | 307 |
| 011111110 | 254 | 100110001 | 281 | 001011001 | 308 |
| 111111110 | 255 | 010110001 | 282 | 101011001 | 309 |
| 000000001 | 256 | 110110001 | 283 | 011011001 | 310 |
| 100000001 | 257 | 001110001 | 284 | 111011001 | 311 |
| 010000001 | 258 | 101110001 | 285 | 000111001 | 312 |
| 110000001 | 259 | 011110001 | 286 | 100111001 | 313 |
| 001000001 | 260 | 111110001 | 287 | 010111001 | 314 |
| 101000001 | 261 | 00001001 | 288 | 110111001 | 315 |
| 011000001 | 262 | 10001001 | 289 | 001111001 | 316 |
| 111000001 | 263 | 010001001 | 290 | 101111001 | 317 |
| 000100001 | 264 | 110001001 | 291 | 011111001 | 318 |
| 100100001 | 265 | 001001001 | 292 | 111111001 | 319 |
| 010100001 | 266 | 101001001 | 293 | 00000101 | 320 |
| 110100001 | 267 | 011001001 | 294 | 10000101 | 321 |
| 001100001 | 268 | 111001001 | 295 | 01000101 | 322 |
| 101100001 | 269 | 000101001 | 296 | 11000101 | 323 |
| 011100001 | 270 | 100101001 | 297 | 001000101 | 324 |

Appendix: DMX Address Setting Table

| DIP SWITCH | DMX ADDR | DIP SWITCH | DMX ADDR | DIP SWITCH | DMX ADDR |
|------------|----------|------------|----------|------------|----------|
| 123456789 | NUMBER | 123456789 | NUMBER | 123456789 | NUMBER |
| 101000101 | 325 | 000001101 | 352 | 110111101 | 379 |
| 011000101 | 326 | 100001101 | 353 | 001111101 | 380 |
| 111000101 | 327 | 010001101 | 354 | 101111101 | 381 |
| 000100101 | 328 | 110001101 | 355 | 011111101 | 382 |
| 100100101 | 329 | 001001101 | 356 | 111111101 | 383 |
| 010100101 | 330 | 101001101 | 357 | 000000011 | 384 |
| 110100101 | 331 | 011001101 | 358 | 100000011 | 385 |
| 001100101 | 332 | 111001101 | 359 | 010000011 | 386 |
| 101100101 | 333 | 000101101 | 360 | 110000011 | 387 |
| 011100101 | 334 | 100101101 | 361 | 001000011 | 388 |
| 111100101 | 335 | 010101101 | 362 | 101000011 | 389 |
| 000010101 | 336 | 110101101 | 363 | 011000011 | 390 |
| 100010101 | 337 | 001101101 | 364 | 111000011 | 391 |
| 010010101 | 338 | 101101101 | 365 | 000100011 | 392 |
| 110010101 | 339 | 011101101 | 366 | 100100011 | 393 |
| 001010101 | 340 | 111101101 | 367 | 010100011 | 394 |
| 101010101 | 341 | 000011101 | 368 | 110100011 | 395 |
| 011010101 | 342 | 100011101 | 369 | 001100011 | 396 |
| 111010101 | 343 | 010011101 | 370 | 101100011 | 397 |
| 000110101 | 344 | 110011101 | 371 | 011100011 | 398 |
| 100110101 | 345 | 001011101 | 372 | 111100011 | 399 |
| 010110101 | 346 | 101011101 | 373 | 000010011 | 400 |
| 110110101 | 347 | 011011101 | 374 | 100010011 | 401 |
| 001110101 | 348 | 111011101 | 375 | 010010011 | 402 |
| 101110101 | 349 | 000111101 | 376 | 110010011 | 403 |
| 011110101 | 350 | 100111101 | 377 | 001010011 | 404 |
| 111110101 | 351 | 010111101 | 378 | 101010011 | 405 |

Appendix: DMX Address Setting Table

| DIP SWITCH | DMX ADDR | DIP SWITCH | DMX ADDR | DIP SWITCH | DMX ADDR |
|------------|----------|------------|----------|------------|----------|
| 123456789 | NUMBER | 123456789 | NUMBER | 123456789 | NUMBER |
| 011010011 | 406 | 100011011 | 433 | 001100111 | 460 |
| 111010011 | 407 | 010011011 | 434 | 101100111 | 461 |
| 000110011 | 408 | 110011011 | 435 | 011100111 | 462 |
| 100110011 | 409 | 001011011 | 436 | 111100111 | 463 |
| 010110011 | 410 | 101011011 | 437 | 000010111 | 464 |
| 110110011 | 411 | 011011011 | 438 | 100010111 | 465 |
| 001110011 | 412 | 111011011 | 439 | 010010111 | 466 |
| 101110011 | 413 | 000111011 | 440 | 110010111 | 467 |
| 011110011 | 414 | 100111011 | 441 | 001010111 | 468 |
| 111110011 | 415 | 010111011 | 442 | 101010111 | 469 |
| 000001011 | 416 | 110111011 | 443 | 011010111 | 470 |
| 100001011 | 417 | 001111011 | 444 | 111010111 | 471 |
| 010001011 | 418 | 101111011 | 445 | 000110111 | 472 |
| 110001011 | 419 | 011111011 | 446 | 100110111 | 473 |
| 001001011 | 420 | 111111011 | 447 | 010110111 | 474 |
| 101001011 | 421 | 000000111 | 448 | 110110111 | 475 |
| 011001011 | 422 | 100000111 | 449 | 001110111 | 476 |
| 111001011 | 423 | 010000111 | 450 | 101110111 | 477 |
| 000101011 | 424 | 110000111 | 451 | 011110111 | 478 |
| 100101011 | 425 | 001000111 | 452 | 111110111 | 479 |
| 010101011 | 426 | 101000111 | 453 | 000001111 | 480 |
| 110101011 | 427 | 011000111 | 454 | 100001111 | 481 |
| 001101011 | 428 | 111000111 | 455 | 010001111 | 482 |
| 101101011 | 429 | 000100111 | 456 | 110001111 | 483 |
| 011101011 | 430 | 100100111 | 457 | 001001111 | 484 |
| 111101011 | 431 | 010100111 | 458 | 101001111 | 485 |
| 000011011 | 432 | 110100111 | 459 | 011001111 | 486 |

Appendix: DMX Address Setting Table

| DIP SWITCH | DMX ADDR | DIP SWITCH | DMX ADDR | DIP SWITCH | DMX ADDR |
|------------|----------|------------|----------|------------|----------|
| 123456789 | NUMBER | 123456789 | NUMBER | 123456789 | NUMBER |
| 111001111 | 487 | 000011111 | 496 | 100111111 | 505 |
| 000101111 | 488 | 100011111 | 497 | 010111111 | 506 |
| 100101111 | 489 | 010011111 | 498 | 110111111 | 507 |
| 010101111 | 490 | 110011111 | 499 | 001111111 | 508 |
| 110101111 | 491 | 001011111 | 500 | 101111111 | 509 |
| 001101111 | 492 | 101011111 | 501 | 011111111 | 510 |
| 101101111 | 493 | 011011111 | 502 | 111111111 | 511 |
| 011101111 | 494 | 111011111 | 503 | | |
| 111101111 | 495 | 000111111 | 504 | | |